


# Gikoka

## DIGITAL MULTIMETER TDM96 SERIES

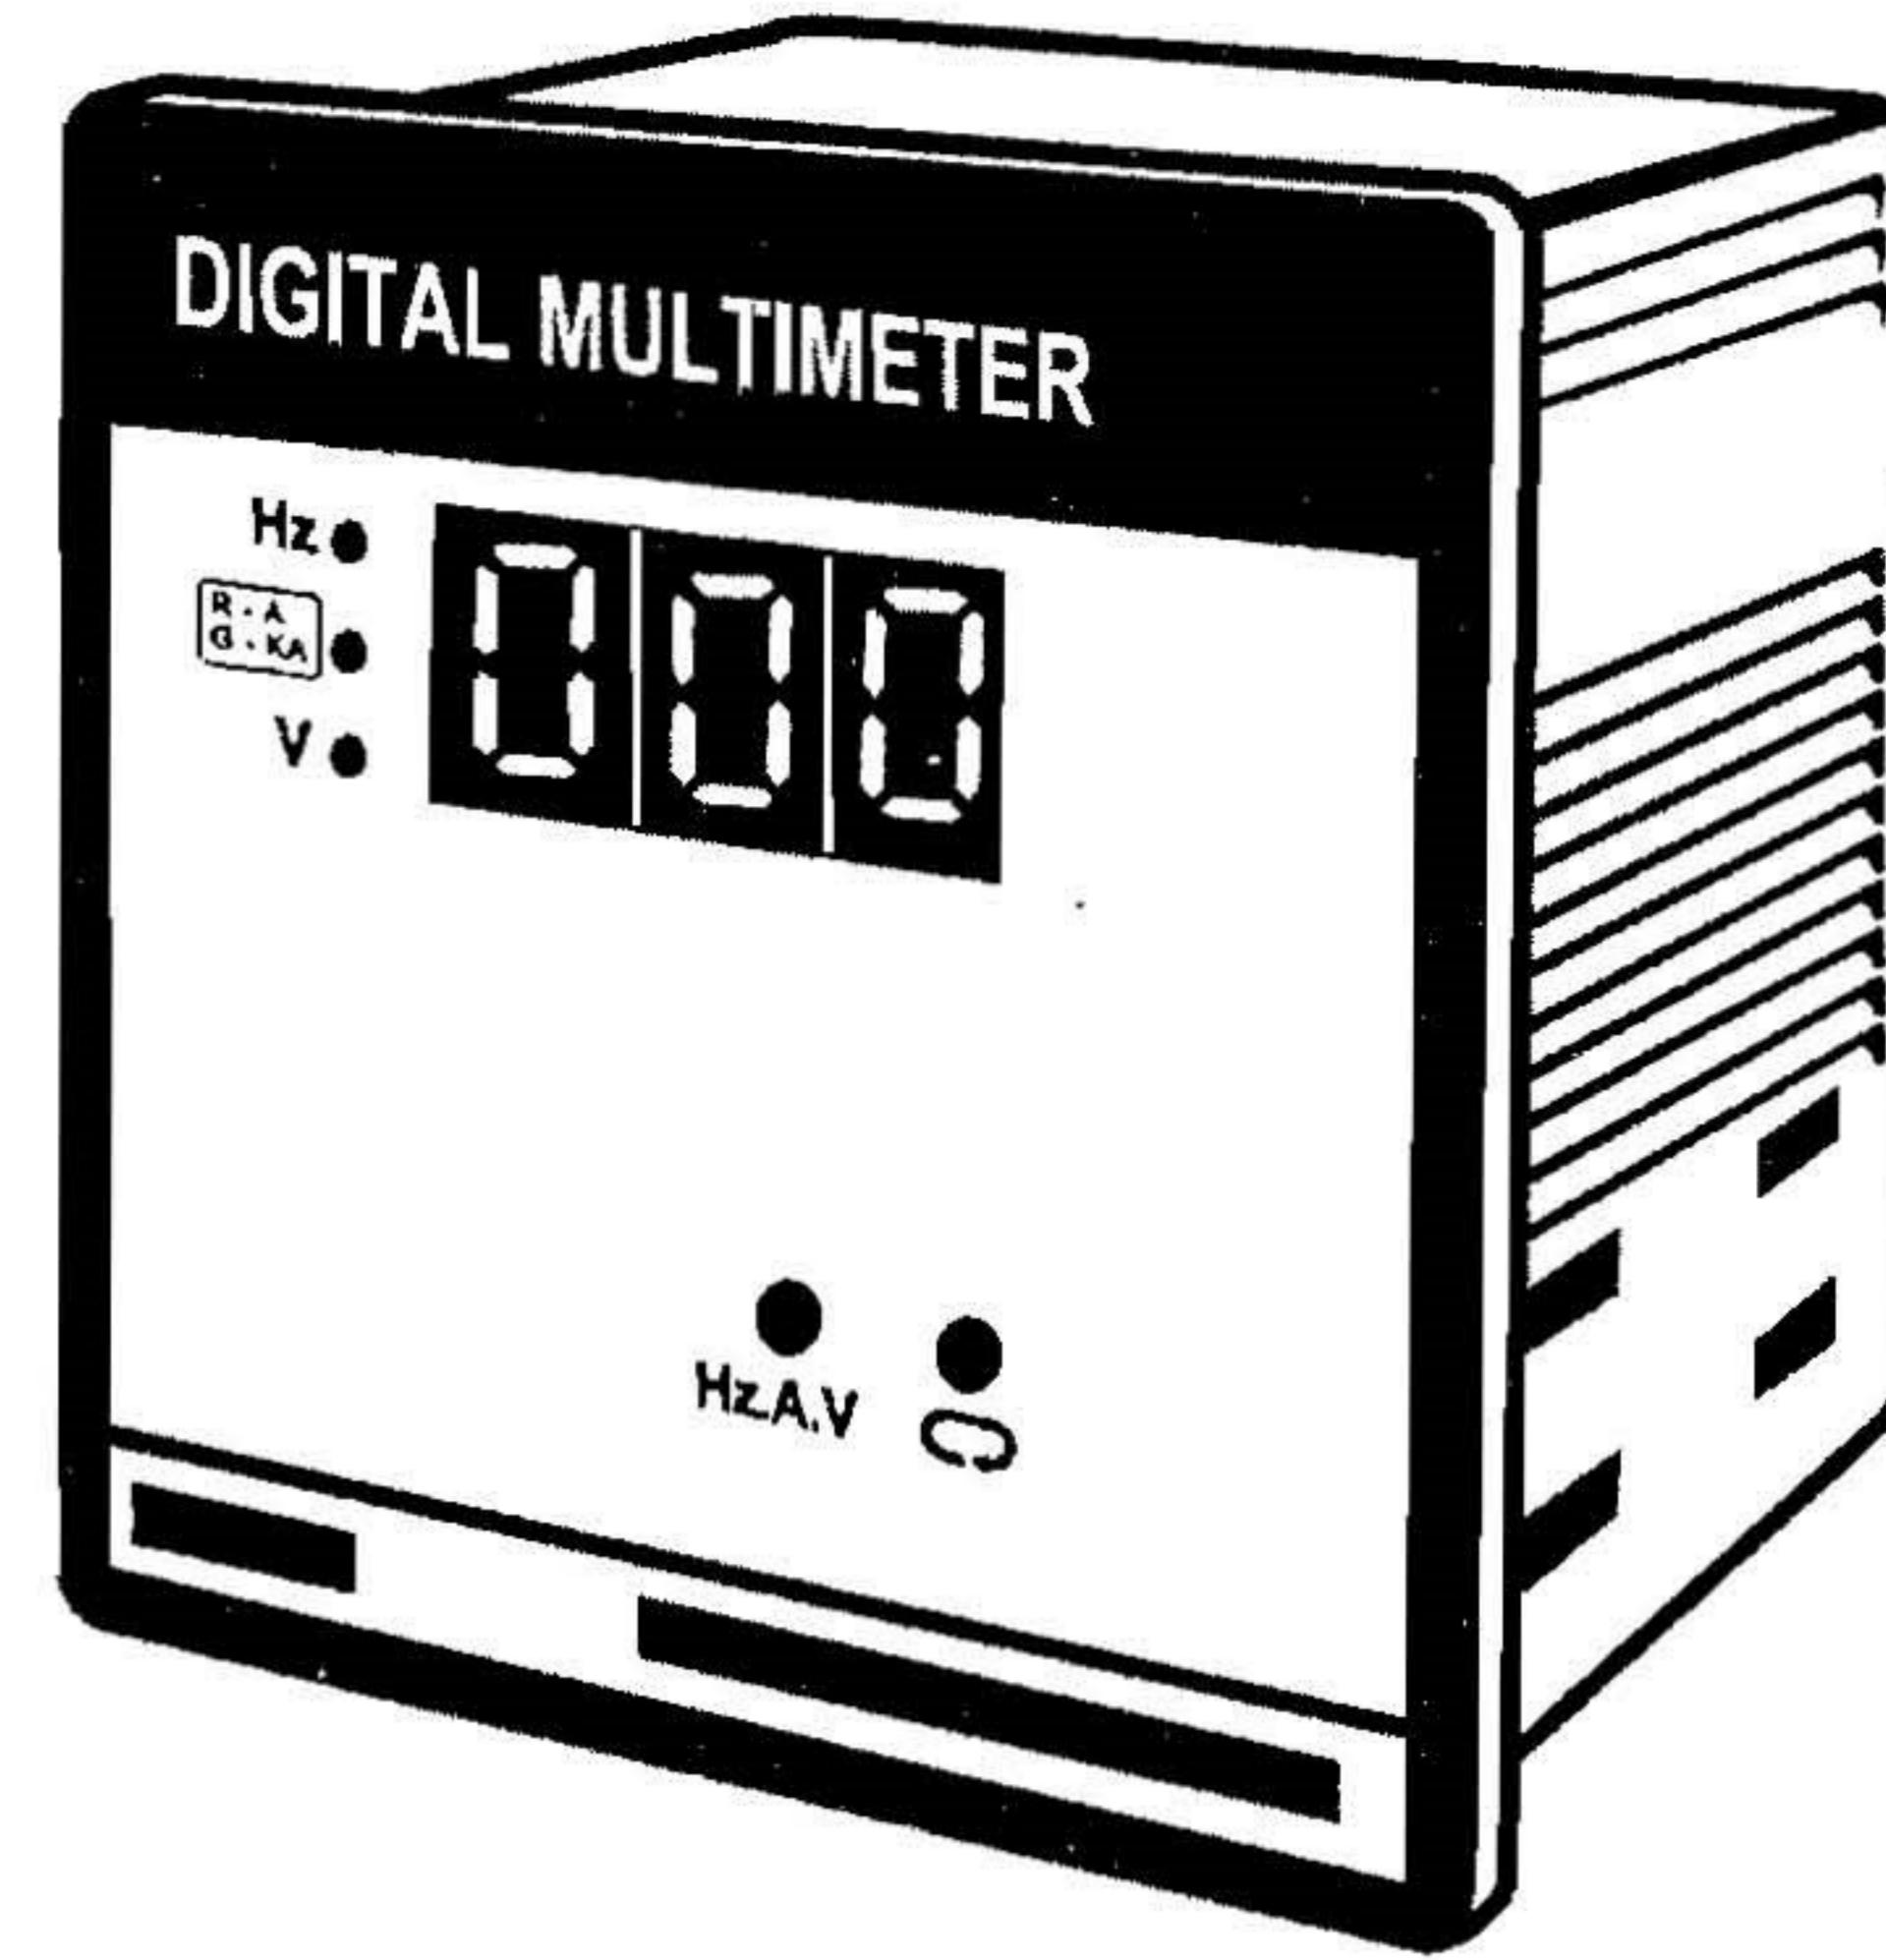

DISPLAY	Red high efficiency LED high 14.22mm (.56")
ACCURACY	± 0.5% ± 2 digit
OPERATING CONDITION	-10°C~50°C (20% to 90% RH non-condensed)
DIELECTRIC STRENGTH	AC 2KV/1min
AUX. POWER	AC110V/220V 50/60Hz
MEASUREMENT RANGE	<p><b>TDM96-A</b></p> <p><b>Ranges:</b> Direct Measurement Current: AC 0 – 5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key "C.T." to select desirable C. T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA).</p> <p><b>TDM96-V</b></p> <p><b>Range:</b> AC 50-600V.</p> <p><b>TDM96-Hz</b></p> <p><b>Frequency:</b> 1-99.9Hz. <b>Input voltage:</b> AC 50-600V.</p> <p><b>TDM96-AV</b></p> <p><b>Ranges:</b> Direct Measurement Current: AC 0– 5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key "C.T." to select desirable C. T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA). <b>Voltage:</b> AC 50-600V.</p> <p><b>TDM96-E</b></p> <p><b>Ranges:</b> Direct Measurement Current: AC 0 – 5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key "C.T." to select desirable C. T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA). <b>Voltage:</b> AC 50-600V. <b>Frequency:</b> 1-99.9Hz.</p>
STANDARD FEATURES	<p>Function Indicator</p> <ul style="list-style-type: none"> <li>This key is for selecting C.T. ratio.</li> <li>This Key for setting measuring function. (Hz → A → V)</li> </ul>
DIMENSION	